


Hall effect Current Sensor

SCK18

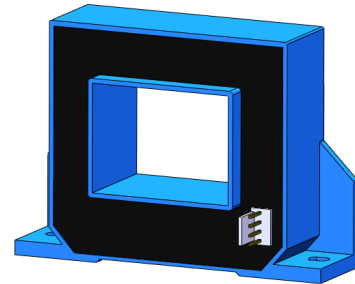

Product description:

Features

- Based on the Hall effect measurement principle, open loop circuit method.
- The isolation voltage between primary and secondary is greater than 5000VAC.
- Designed according to UL94-V0 flame retardant rating.
- Using automatic adjustment technology, product performance is better.

Performance

- Can measure DC, AC, pulse, and various irregular waveforms under isolated conditions.
- Wide measurement range, fast response speed, low zero drift, low temperature drift, high accuracy and good linearity.
- Dynamic performance (di/dt and response time) is optimal when the busbar is fully filled with primary perforations.
- Strong ability to resist external electromagnetic interference (BCI, EFT, CS, CE, ESD, dv/dt, etc.).

Application

- It can be widely used in inverters, UPS, photovoltaic inverters, electric vehicle drives, high-frequency power supplies, inverter welding machines and other products.

Implementation standards

- GB/T 7665-2005
- JB/T 7490-2007
- JB/T 25480-2010
- JB/T 9473-2020
- SJ 20792-2000

Certifications



Technical Parameters

Model Parameters (25°C)	SCK18-						
	400A	500A	600A	800A	1000A	1200A	1500A
Primary Current (A) I_{PN}	400A	500A	600A	800A	1000A	1200A	1500A
Primary Current Max. Peak Value (A) I_{PM}	±1200A	±1500A	±1800A	±2400A	±2400A	±2400A	±2400A
Output voltage (V) $V_{out} @ \pm I_{PN}$, $R_L = 10K\Omega$	±4V±1%						

2

Electrical Data

Item	Min.	Max.	Typical	Unit
Input power supply voltage range V_c (±5%) (Remark 1, Remark 2)	±11	±15	±18	V_{DC}
Current consumption I_c	-	±15	±20	mA
Withstand resistance R_{INS} @500V DC	1000	-	-	$M\Omega$
Output voltage V_{out} @ I_{PN} , $R_L = 10K\Omega$, $T_A = 25^\circ C$	3.960	4.000	4.040	V
Output internal resistance R_{OUT}	-	102	-	Ω
Load Resistance R_L (Remark 3)	1	10	-	$K\Omega$
Accuracy X @ I_{PN} , $T_A = 25^\circ C$	-	±1	-	%
Linearity ϵ_L @ $R_L = 10K\Omega$, $T_A = 25^\circ C$	-	±0.5	-	% I_{PN}
Offset voltage V_{OE} @ $T_A = 25^\circ C$	-	±10	±20	mV
Hysteresis voltage V_{OM} @ $I_{PN} \rightarrow 0$	-	±10	±20	mV
Temperature Coefficient of Offset Voltage TCV_{OE}	-	±0.5	±1	mV/ $^\circ C$
Output voltage temperature coefficient TCV_{out}	-	±0.05	±0.1	%/ $^\circ C$
Response time t_D @ $0 \rightarrow I_{PN}$	-	3	5	us
Ambient operating temperature T_A	-40	25	125	$^\circ C$
Ambient storage temperature T_s	-40	25	125	$^\circ C$
Withstand voltage $V_D @ 50Hz, 60s, 0.1mA$		5000		V_{AC}
Weight m		260		g

Remarks:

1. If VC is less than the minimum value, the measurement will be inaccurate. If VC is greater than

Shenzhen SoCan Technologies Co.,Ltd

SoCan is committed to continuously improving product quality, and the company reserves the right to update its products.

www.szsocan.com





the maximum value, it may cause permanent failure of the measuring device.

2. When $\pm 12V < V_{CC} < \pm 15V$, will reduce the measurement range.


3.
$$V_{OUT} = 4.00 * \frac{R_L}{102 + R_L} * \frac{I_P}{I_{PN}} + V_{OE}$$

4. $di/dt > 50A/uS$

Dimensions (in mm)

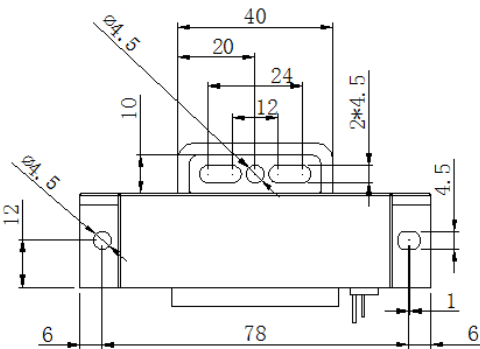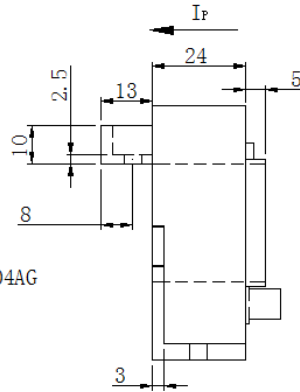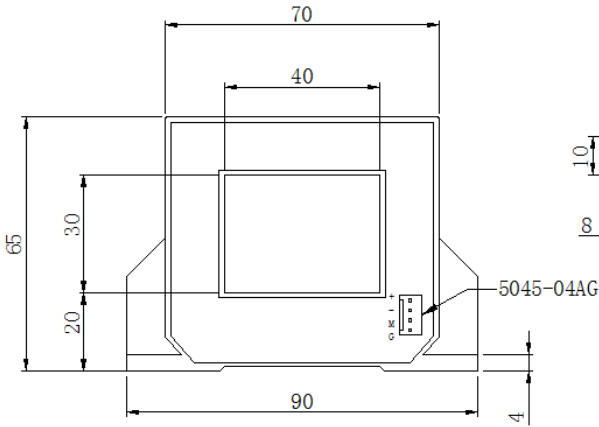

序号	标识	说明
1	+	+15V
2	-	-15V
3	M	Output
4	G	0V

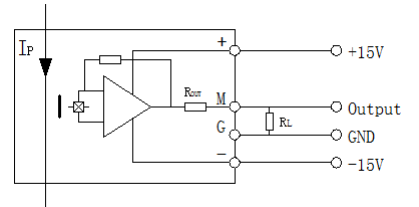

Notes:

1. Size error: $\pm 1mm$;
2. Primary aperture: $40*30mm$;
3. Fastening hole: $\phi 4.5mm*2$;
4. The output terminal is compatible with Molex 5045-04A;
5. The IP indication direction is the positive direction of the current;
6. The temperature of the primary conductor shall not exceed $105^{\circ}C$;